


# 1718

## VINYL FOAM SEALANT TAPE

VentureTape® 1718 is 1/8 inch closed cell grey vinyl foam coated with a specially formulated pressure sensitive adhesive system applied. Designed for use as a vapor seal where large spaces occur, VentureTape 1718 is also ideal for use as a lap joint seal in corrugated metal building panels or prefabricated wall panels.

### Product Construction

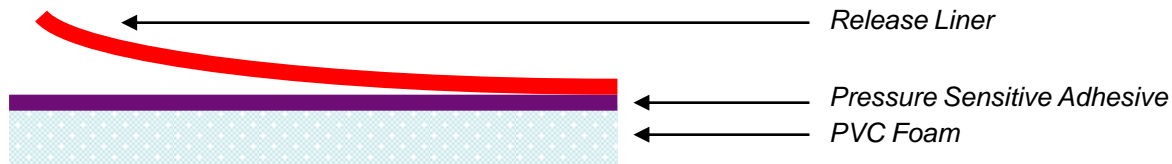

### Features & Benefits

- Versatile foam sealant tape is ideal for use on a wide variety of building materials
- High performance acrylic adhesive performs well over a wide temperature range
- Easy installation
- Also excels in high heat and humidity conditions
- In stock product available for immediate delivery

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness <sup>Ω</sup>	125.0 mils	3.2 mm	PSTC-133
Peel Adhesion	20 oz/in	5.6 N/25 mm	PSTC-101
Tensile Strength	4.4 lb/in	19.7 N/25 mm	PSTC-131
Elongation	130 %	130 %	
Service Temperature	-20 to 130 °F	-29 to 54 °C	

<sup>Ω</sup> - excluding liner

<sup>Δ</sup> - 20 minute dwell

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

### Product Configurations

- Standard and custom roll sizes available, contact Venture Tape for specifications and requirements

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

[www.venturetape.com](http://www.venturetape.com)

# VentureTape®

GTA - NHT, Inc.  
Venture Tape  
30 Commerce Rd., Rockland, MA 02370  
Tel 781-331-5900; Fax 781-871-0065  
800-343-1076 (U.S.A.), 800-544-1024 (Canada)  
Toll Free Fax 877-264-5490  
[www.venturetape.com](http://www.venturetape.com)

**GTA**  
TAPES & ADHESIVES  
a 3M Company